
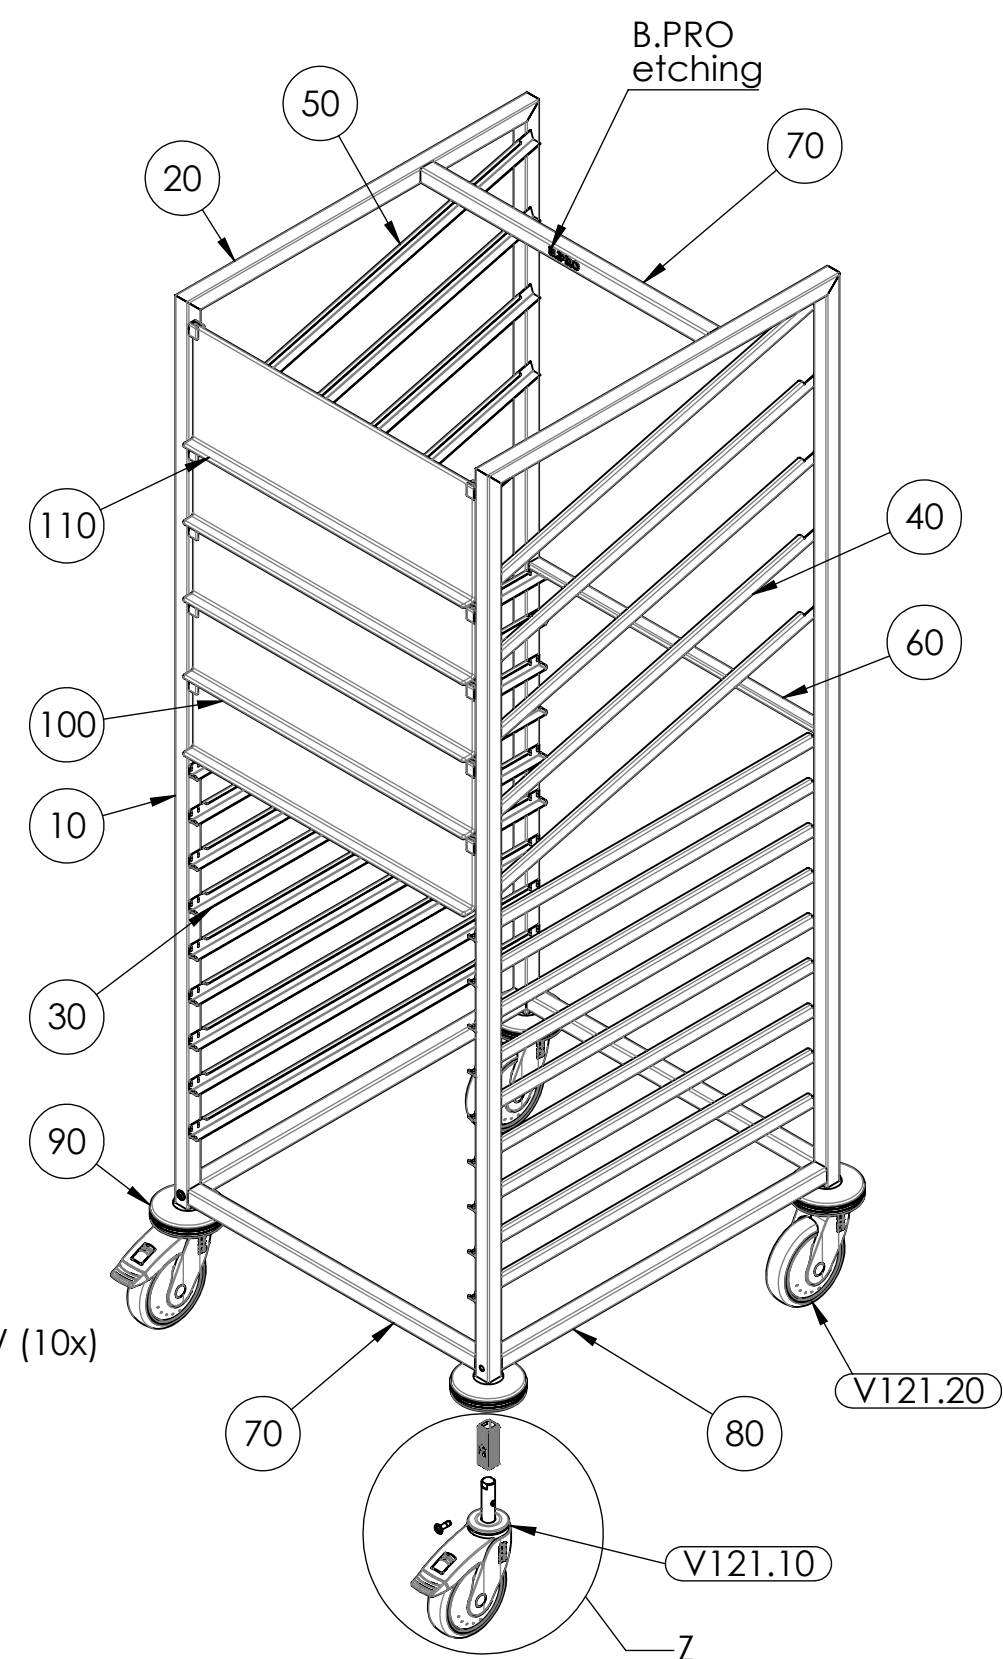
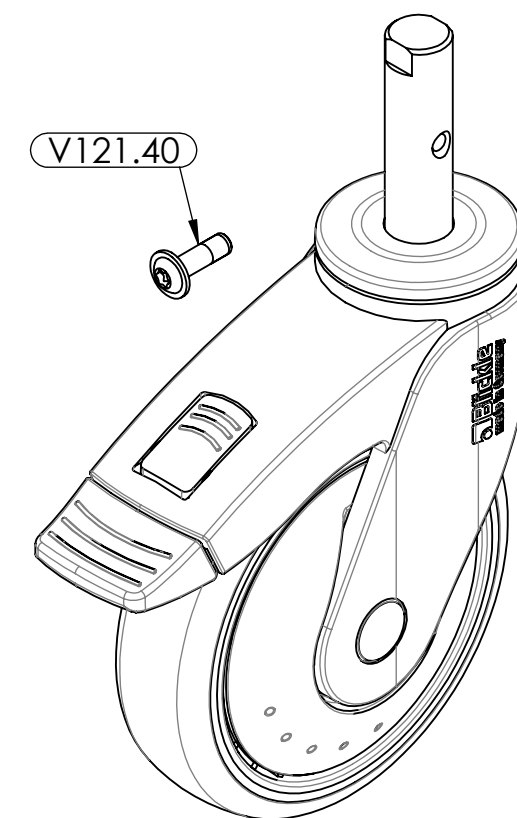
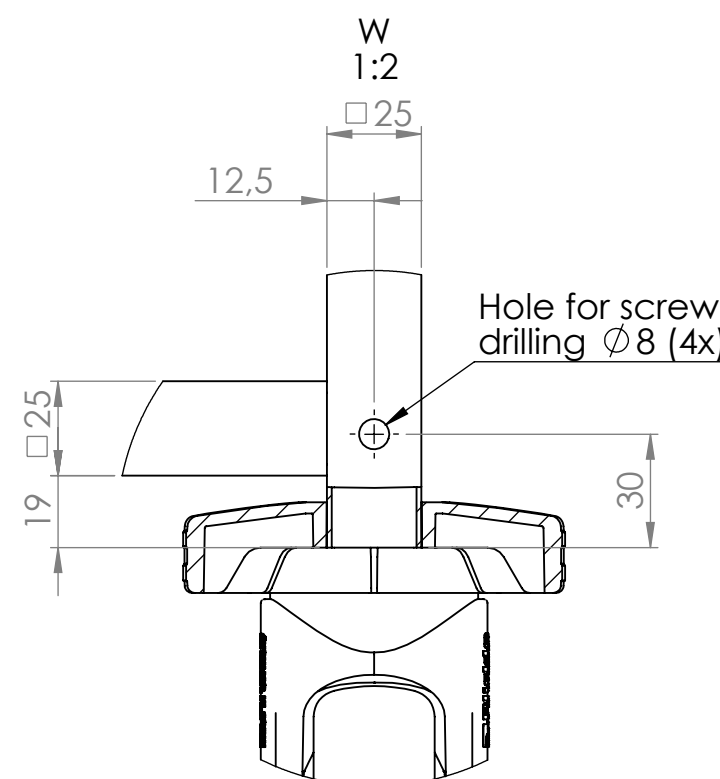
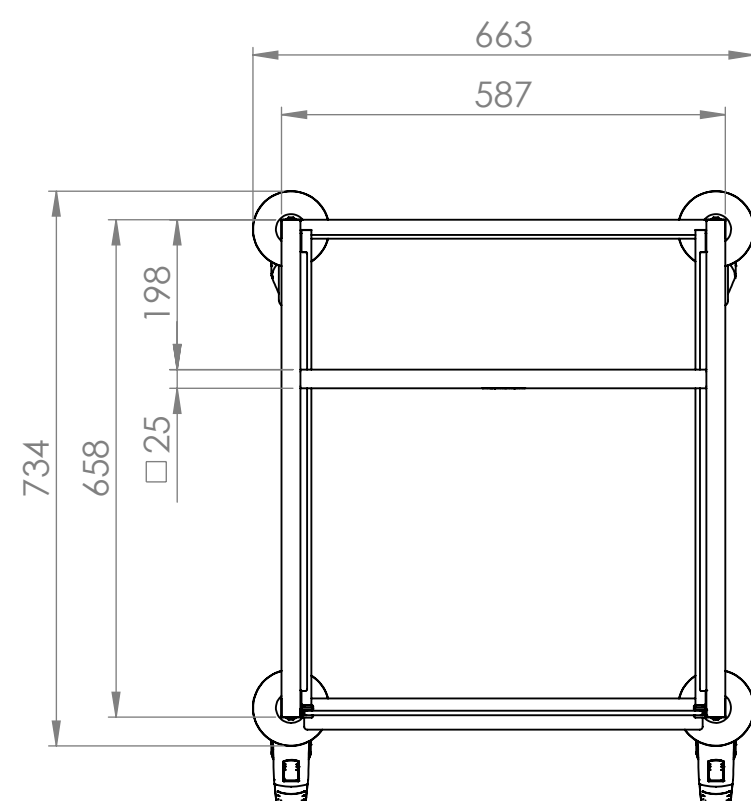
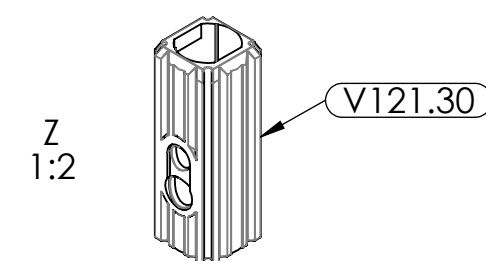
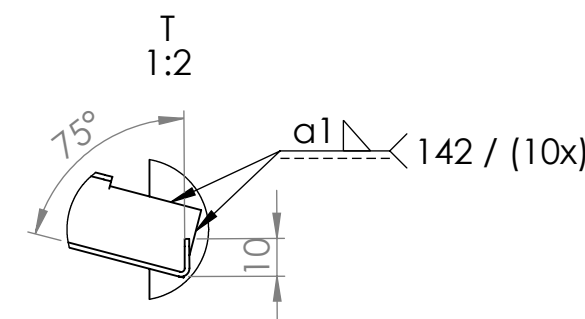
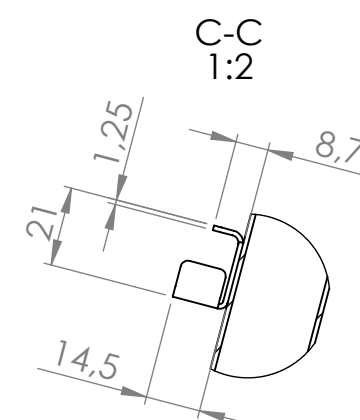
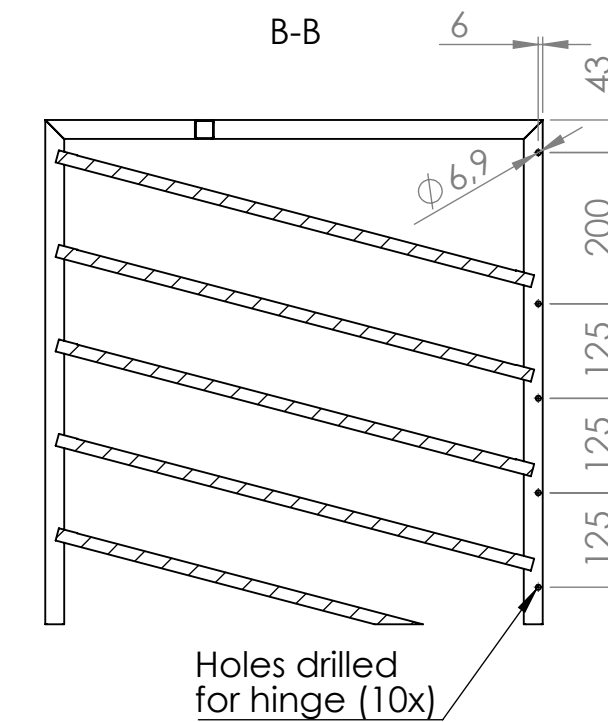
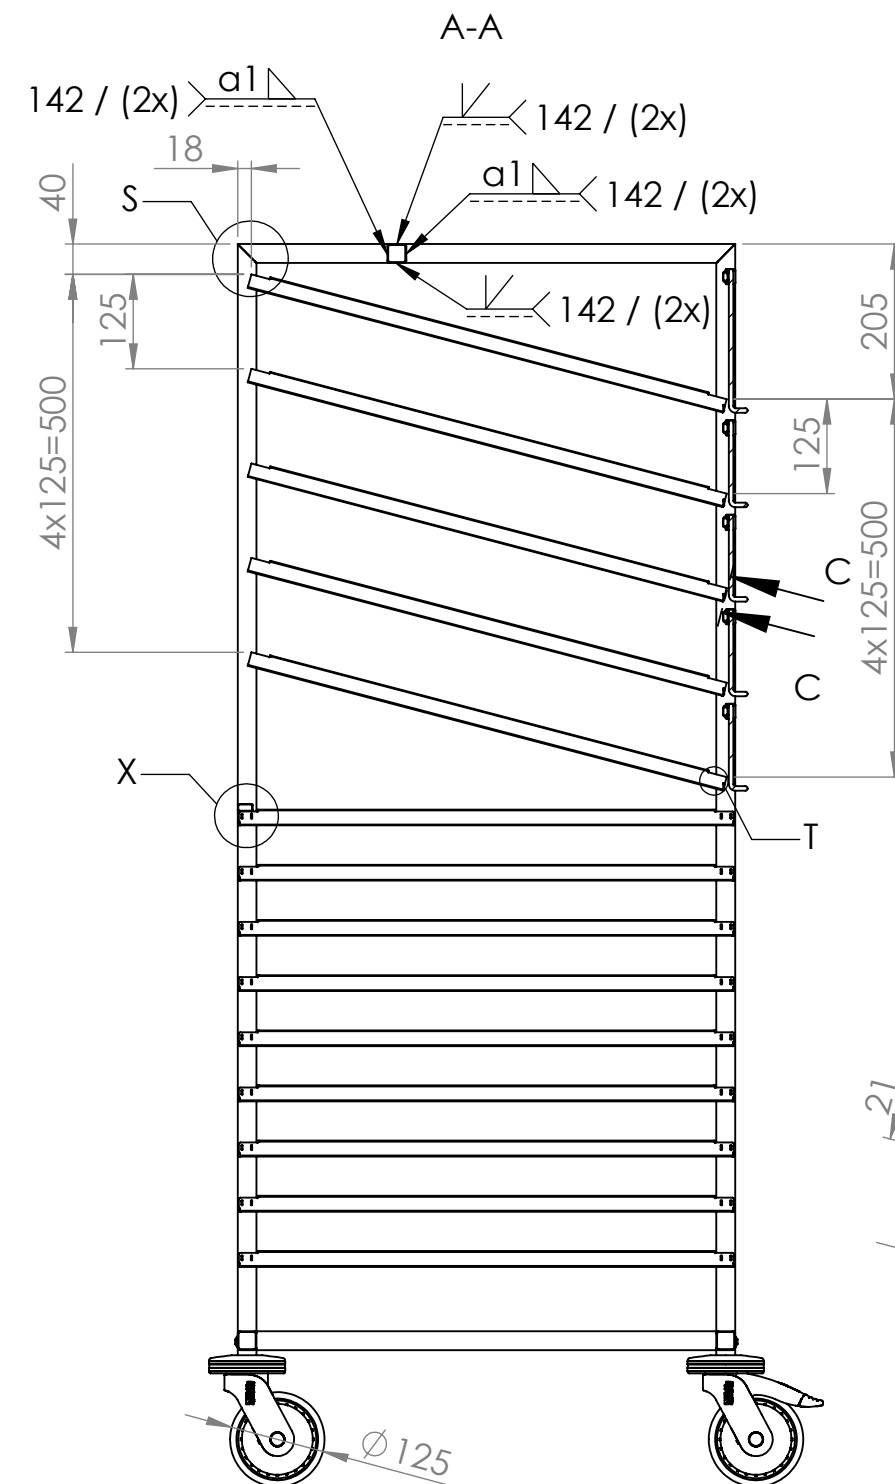
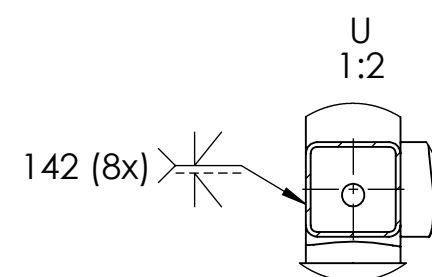
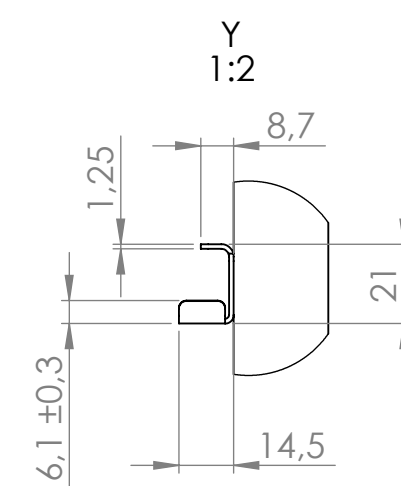
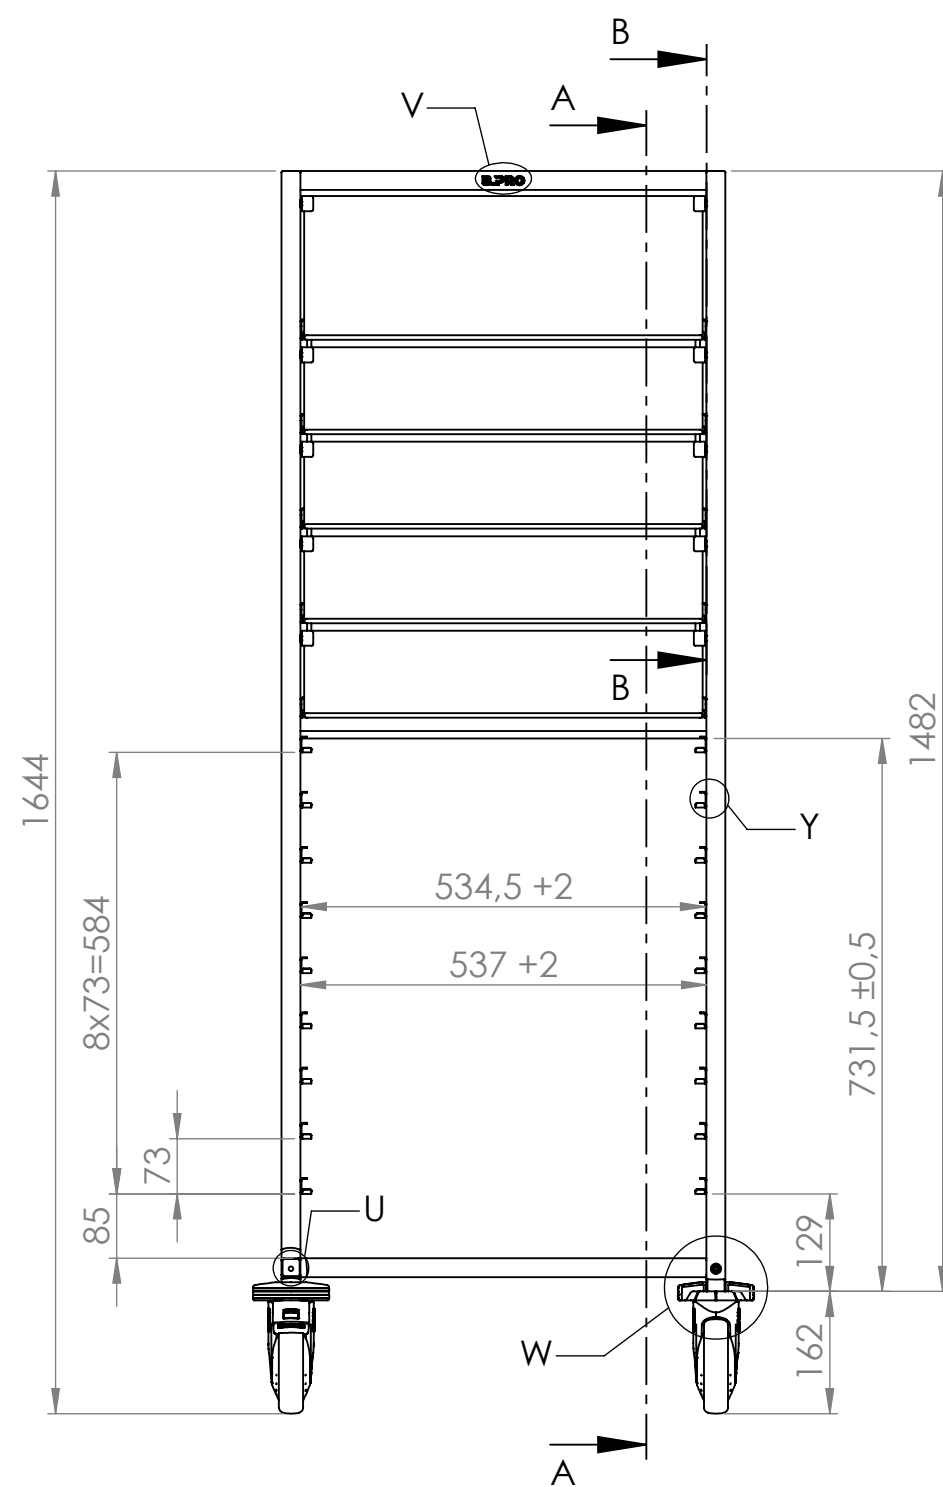
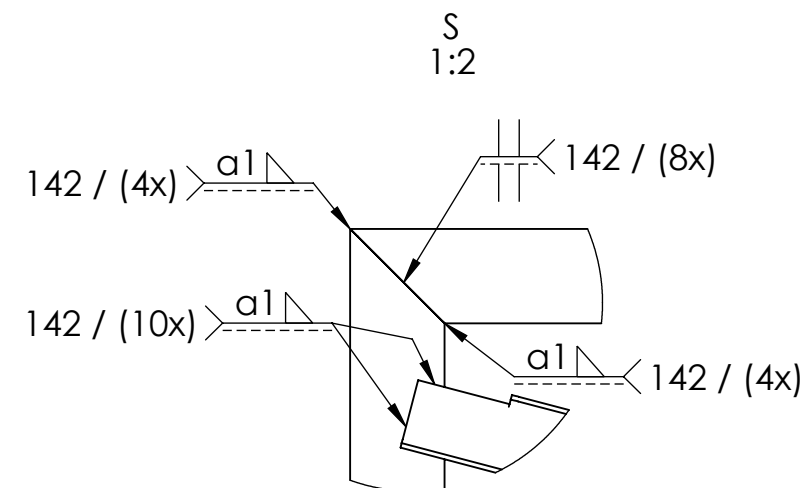
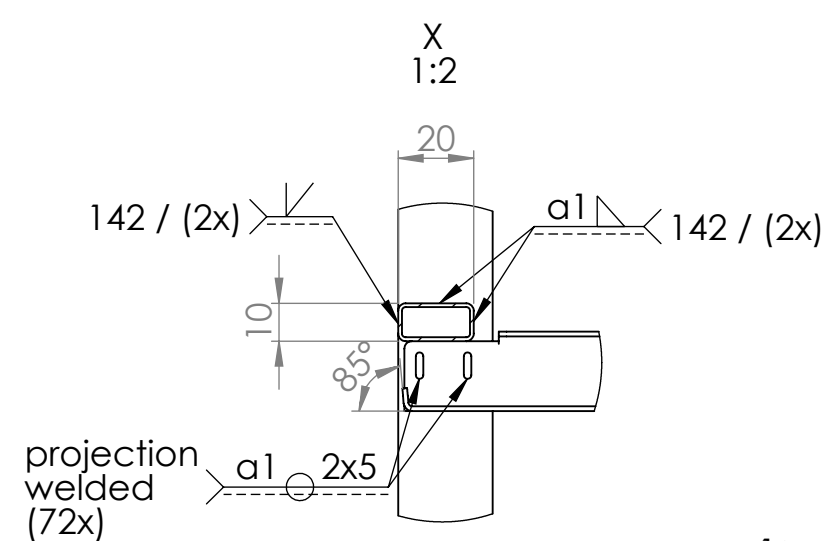
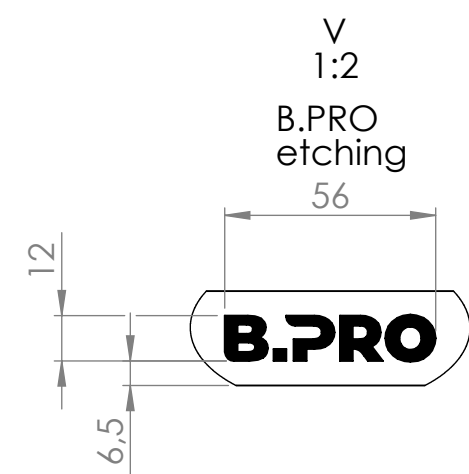




For support bracket pos.30, pos.40 and pos.50:
- non - dimensioned radii R1
- surface finish 2B

Wall thickness of pos.60: 1,0mm
Wall thickness of all other tubes: 1,25mm

Schweißnähte nach / Welds to / Svary podle ISO 5817-B
Schweißnähte versäubert / Welds cleaned / Svary začišťeny

1											
Index	Rev.-No.	Description of modification							Date	Name	
B.PRO	Scale	M 1:10	Group	100	Status	freigegeben	Document type	ZB	Std. paper-size	A2	
		Material					Surface				
		Date	Name	Document item-no.							
	Drawn	03.03.2023	KeselC	2000301715.01							
	Checked	12.05.2023	KüblerD	SAP material-no.							
ISO 2768-mK	Approved	12.05.2023	KüblerD	00367610							
ISO 13920-BF	Description										
Origin	RWR SK-161										
Notice:								2000129473	Sheet	1 of 1	